


Analogue Wall Sounder


Features

- ▶ Loop Powered
- ▶ Single Loop Address addressed via the TCH-B100 Hand Held Programmer
- ▶ Variable Sound Output 90 ~ 102 dB(A) (±2 dB(A)) output at 1 metre
- ▶ Fits Hochiki Standard or Isolator Base
- ▶ Weatherproof Kit available
- ▶ 51 User-Selectable Tones (all tones EN54-3 compatible)
- ▶ Approved by LPCB & VdS
- ▶ Approved to SIL2

Description



Also incorporates an auto shut-down mode* which allows the user to set a fixed time within which the sounder will operate, before automatically silencing itself, ideal for minimising noise pollution.

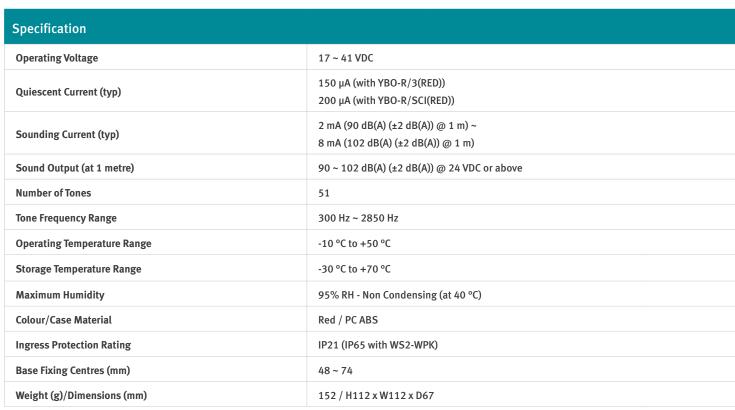

Dependent on control panel compatibility.

Note: Although the TCH-B100 Hand Held Programmer will allow addresses between 128 and 254 to be programmed into the CHQ-WS2, addresses 1 to 127 ONLY should be used.

Ordering Codes

Product Part Number

Analogue Wall Sounder CHQ-WS2/SIL **Weatherproof Kit** CHQ-WPK











