

DS-2CE79DF8T-AZE 2 MP ColorVu PoC Motorized Varifocal Turret



- High quality imaging with 2 MP, 1920 × 1080 resolution
- 24/7 color imaging
- Clear imaging against strong back light due to 130 dB true WDR technology
- 3D DNR technology delivers clean and sharp images
- 2.8 mm to 12 mm varifocal lens, auto focus
- Smart Light, up to 40 m white light distance
- Water and dust resistant (IP68)


▪ Specification

Camera	
Image Sensor	2 MP CMOS
Max. Resolution	1920 (H) × 1080 (V)
Min. Illumination	0.0003 Lux @ (F1.29, AGC ON), 0 Lux with white Light
Shutter Time	PAL: 1/25 s to 1/50,000 s; NTSC: 1/30 s to 1/50,000 s
Day & Night	24/7 Color Imaging
Angle Adjustment	Pan: 0° to 360°, Tilt: 0° to 75°, Rotation: 0° to 360°
Signal System	PAL/NTSC
Lens	
Lens Type	2.8 mm to 12 mm motorized, auto focus
Focal Length & FOV	horizontal FOV: 92.3° to 34.2°, vertical FOV: 48.4° to 19°, diagonal FOV: 112.2° to 39.2°
Lens Mount	Φ24
Illuminator	
Supplement Light Type	White Light
Supplement Light Range	Up to 40 m
Smart Supplement Light	Yes
Supplement Light Type	White Light
Image	
Image Parameters Switch	STD/HIGH-SAT/HIGHLIGHT
Image Settings	Brightness, Mirror, Sharpness, Anti-Banding, AGC
Frame Rate	TVI: 1080p @ 25 fps/30 fps
Wide Dynamic Range (WDR)	≥130 dB
Image Enhancement	BLC, HLC, Global, HLS
Privacy Mask	4 programmable privacy masks
Noise Reduction	3D DNR/2D DNR
White Balance	Auto/Manual
Interface	
Video Output	1 HD analog output
Event	
Motion Detection	4 programmable motion areas
General	
Power	12 VDC/24 VAC±20%/PoC.at, max: 12.2 W
Material	Metal
Dimension	Ø141.4 mm × 134.7 mm (Ø5.57" × 5.3")
Weight	Approx. 840 g (1.85 lb.)
Operating Condition	Ø141.4 mm × 134.7 mm (Ø5.57" × 5.3")
Communication	HIKVISION-C
Language	English
Approval	
Protection	IP68

▪ Available Model



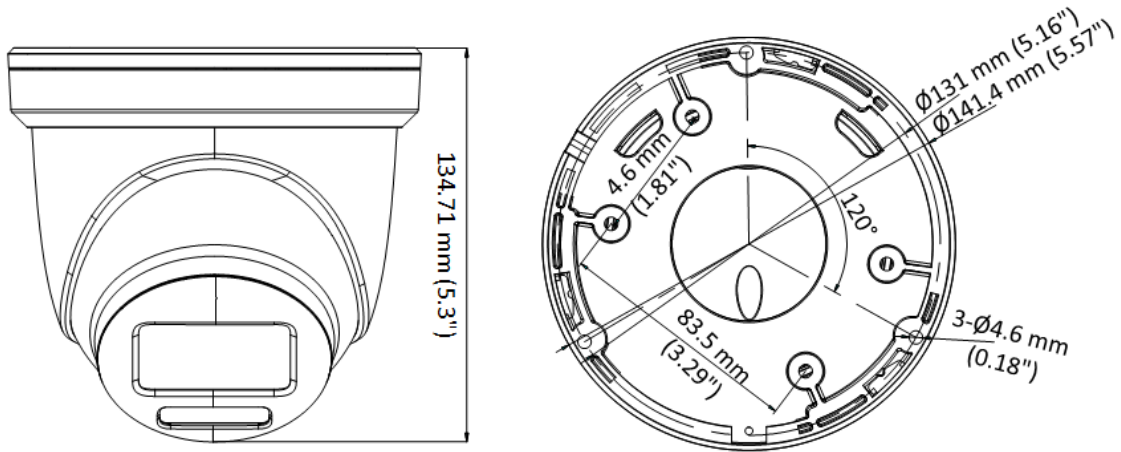







DS-2CE79DF8T-AZE(2.8-12mm)

▪ **Dimension**



▪ **Accessory**

▪ **Optional**

DS-1275ZJ-SUS(Grey)#UK	DS-1273ZJ-140(BLACK) Wall Mount	DS-1271ZJ-140 Pendant Mount	DS-1275ZJ-SUS Vertical Pole Mount	DS-1276ZJ-SUS Corner Mount
				
				
DS-1280ZJ-DM21 Junction Box	DS-1273ZJ-140B Wall Mount	DS-1273ZJ-140 Wall Mount		



Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq